

arqua station

Features the Arqua Fountain and Refill Pole to facilitate drinking and easy container refilling.



This product is certified under the WaterMark standard WMTS105:2016.

DIMENSIONS:

1520L x 450W x 1495H (mm)
59 7/8" L x 17 3/4" W x 58 7/8" H

Select one box per category to specify your product.

BODY:

[See Colour Chart](#)

- ☐ Fountain Stainless 304 Powder Coated,
Refill Pole Aluminium Powder Coated
- ☐ Both Stainless 316 Powder Coated
- ☐ Both Stainless 316 Electropolished

HEIGHT:

- ☐ 1125mm (Fountain Standard) + 1495mm (Refill Pole)
- ☐ 780mm (Fountain Child) + 1495mm (Refill Pole)
- ☐ Tailored

SPOUT AND BUTTON (for Refill Pole):

- ☐ Single Outlet, Stainless 316 Bright Polished
- ☐ Double Outlet, Stainless 316 Bright Polished

SIGNAGE (for Refill Pole):

Not compatible with a Textura powder coated finish.

- ☐ UV Vinyl 'Tap'
- ☐ UV Vinyl 'Filtered'
- ☐ Tailored

FILTER (for Refill Pole):

- ☐ No
- ☐ Yes

SPOUT HEIGHT (for Refill Pole):

- ☐ 875mm | 34 1/2" (standard)

Some options incur additional fees and lead time.

The Arqua fountain range adheres to Australian drinking water guidelines. Drinking water connected must be at a 7pH level for human consumption. Recommended operating temperature range from 5°C to maximum 60°C. Recommended operating pressure is minimum 0.5 bar (50Kpa) to maximum 5 bar (500Kpa). Installer must check pressure from the relief valve as required.

Need more information?


For a brochure, image gallery, CAD downloads, installation and maintenance guides, go to:

streetfurniture.com/au/product/arqua-station/


Quick links:

streetfurniture.com/au/colour-chart/

streetfurniture.com/au/warranty/

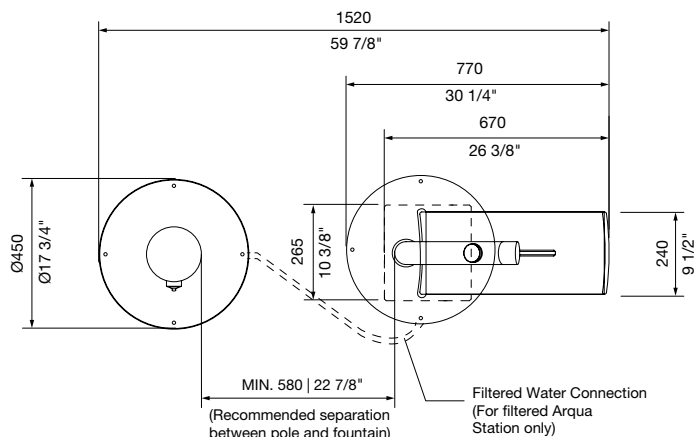

TOP VIEW

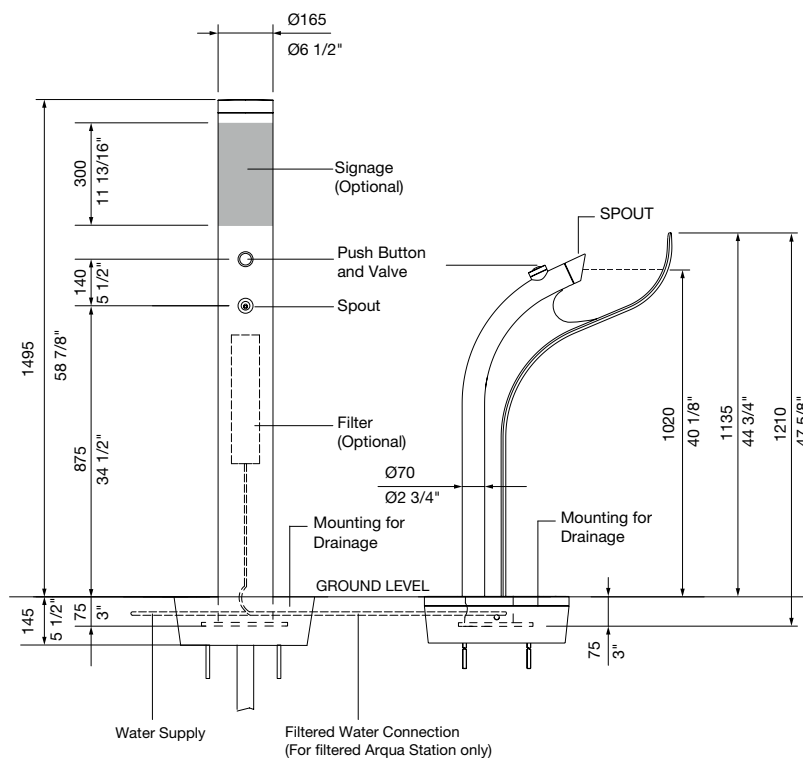

FRONT VIEW



UV Vinyl 'Tap'



UV Vinyl 'Filtered'

SIGNAGE OPTIONS